

封装外形信息



一、基本信息

序号	封装类型	封装外形图	尺寸
1	SOP8	SOP_8_轮廓图	SOP_8_尺寸
2	SOP8-EP	SOP_8_EP_轮廓图	SOP_8_EP_尺寸
3	TO252-5L	TO252_5L_轮廓图	TO252_5L_尺寸
4	TO263-5L	TO263_5L_轮廓图	TO263_5L_尺寸
5	TO220-5L	TO220_5L_轮廓图	TO220_5L_尺寸
6	TO263-7L	TO263_7L_轮廓图	TO263_7L_尺寸
7	SOP16	SOP_16_轮廓图	SOP_16_尺寸
8	DIP16	DIP_16_轮廓图	DIP_16_尺寸



二、详细说明

No.1 SOP8																																																																														
SOP_8_轮廓图			SOP_8_尺寸																																																																											
			<table border="1"> <thead> <tr> <th rowspan="2">Symbol</th> <th colspan="2">Dimensions in millimeters</th> <th colspan="2">Dimensions in inches</th> </tr> <tr> <th>min</th> <th>max</th> <th>min</th> <th>max</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>1.3500</td> <td>1.7500</td> <td>0.0530</td> <td>0.0690</td> </tr> <tr> <td>A1</td> <td>0.0500</td> <td>0.1500</td> <td>0.0020</td> <td>0.0060</td> </tr> <tr> <td>A2</td> <td>1.3500</td> <td>1.5500</td> <td>0.0530</td> <td>0.0610</td> </tr> <tr> <td>b</td> <td>0.3060</td> <td>0.5100</td> <td>0.0120</td> <td>0.0200</td> </tr> <tr> <td>c</td> <td>0.1700</td> <td>0.2500</td> <td>0.0070</td> <td>0.0100</td> </tr> <tr> <td>D</td> <td>4.7000</td> <td>5.1000</td> <td>0.1850</td> <td>0.2000</td> </tr> <tr> <td>E</td> <td>3.8000</td> <td>4.0000</td> <td>0.1500</td> <td>0.1570</td> </tr> <tr> <td>E1</td> <td>5.8000</td> <td>6.2000</td> <td>0.2280</td> <td>0.2440</td> </tr> <tr> <td>e</td> <td colspan="2">1.2700±0.13</td> <td colspan="2">0.0500±0.005</td> </tr> <tr> <td>L</td> <td>0.4000</td> <td>1.2700</td> <td>0.0160</td> <td>0.0500</td> </tr> <tr> <td>L1</td> <td colspan="2">1.0250±0.2</td> <td colspan="2">0.0404±0.007</td> </tr> <tr> <td>L1-L1'</td> <td>-</td> <td>0.12</td> <td>-</td> <td>0.005</td> </tr> <tr> <td>θ</td> <td>0°</td> <td>8°</td> <td>0°</td> <td>8°</td> </tr> </tbody> </table>		Symbol	Dimensions in millimeters		Dimensions in inches		min	max	min	max	A	1.3500	1.7500	0.0530	0.0690	A1	0.0500	0.1500	0.0020	0.0060	A2	1.3500	1.5500	0.0530	0.0610	b	0.3060	0.5100	0.0120	0.0200	c	0.1700	0.2500	0.0070	0.0100	D	4.7000	5.1000	0.1850	0.2000	E	3.8000	4.0000	0.1500	0.1570	E1	5.8000	6.2000	0.2280	0.2440	e	1.2700±0.13		0.0500±0.005		L	0.4000	1.2700	0.0160	0.0500	L1	1.0250±0.2		0.0404±0.007		L1-L1'	-	0.12	-	0.005	θ	0°	8°	0°	8°
Symbol	Dimensions in millimeters		Dimensions in inches																																																																											
	min	max	min	max																																																																										
A	1.3500	1.7500	0.0530	0.0690																																																																										
A1	0.0500	0.1500	0.0020	0.0060																																																																										
A2	1.3500	1.5500	0.0530	0.0610																																																																										
b	0.3060	0.5100	0.0120	0.0200																																																																										
c	0.1700	0.2500	0.0070	0.0100																																																																										
D	4.7000	5.1000	0.1850	0.2000																																																																										
E	3.8000	4.0000	0.1500	0.1570																																																																										
E1	5.8000	6.2000	0.2280	0.2440																																																																										
e	1.2700±0.13		0.0500±0.005																																																																											
L	0.4000	1.2700	0.0160	0.0500																																																																										
L1	1.0250±0.2		0.0404±0.007																																																																											
L1-L1'	-	0.12	-	0.005																																																																										
θ	0°	8°	0°	8°																																																																										



声明：由于产能扩充，相同封装的产品外形存在略微差异，具体信息参考规格书及实物！

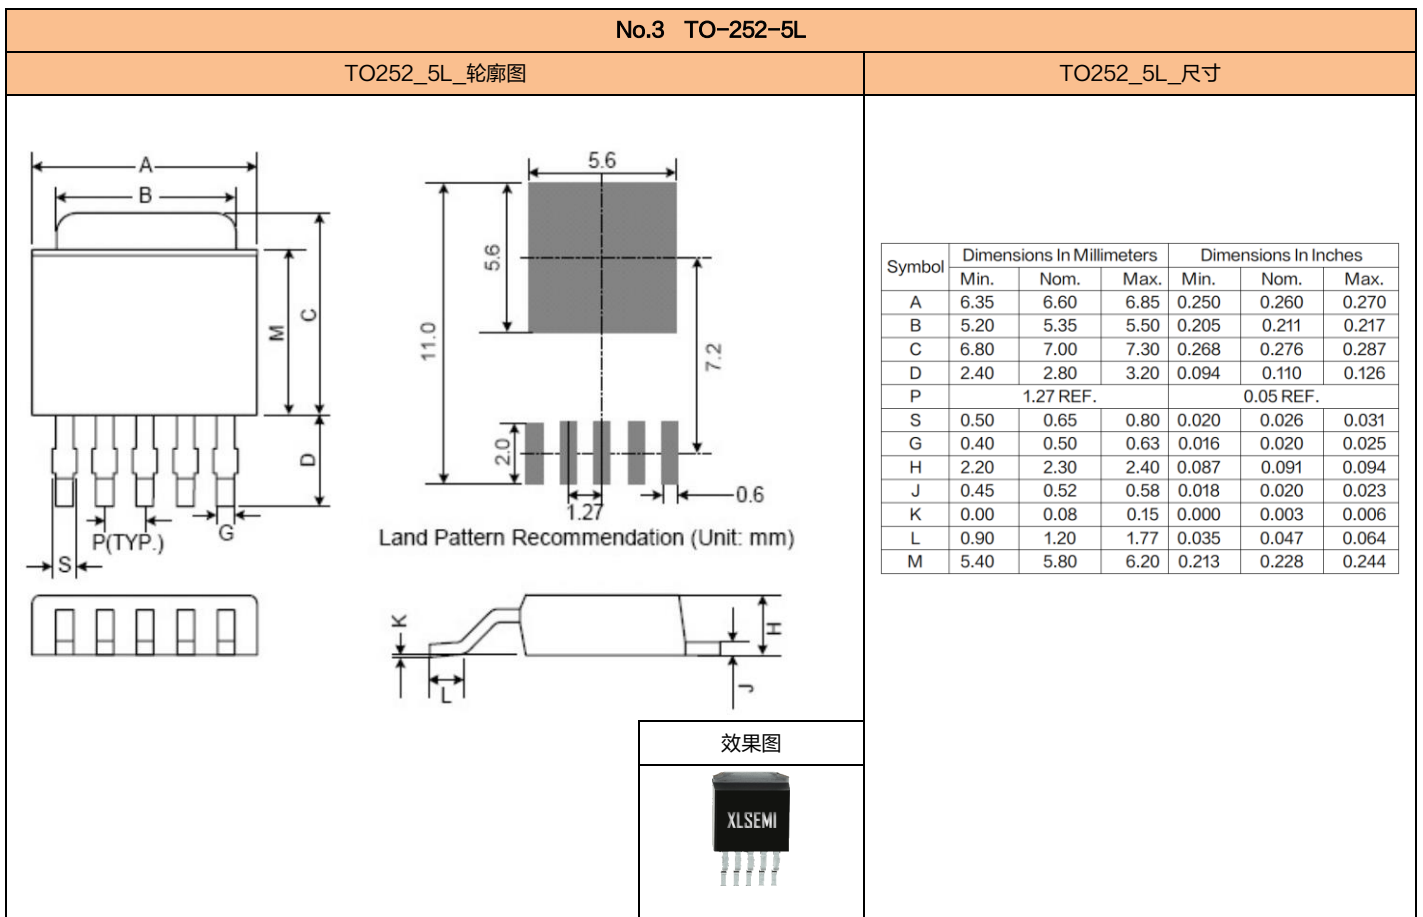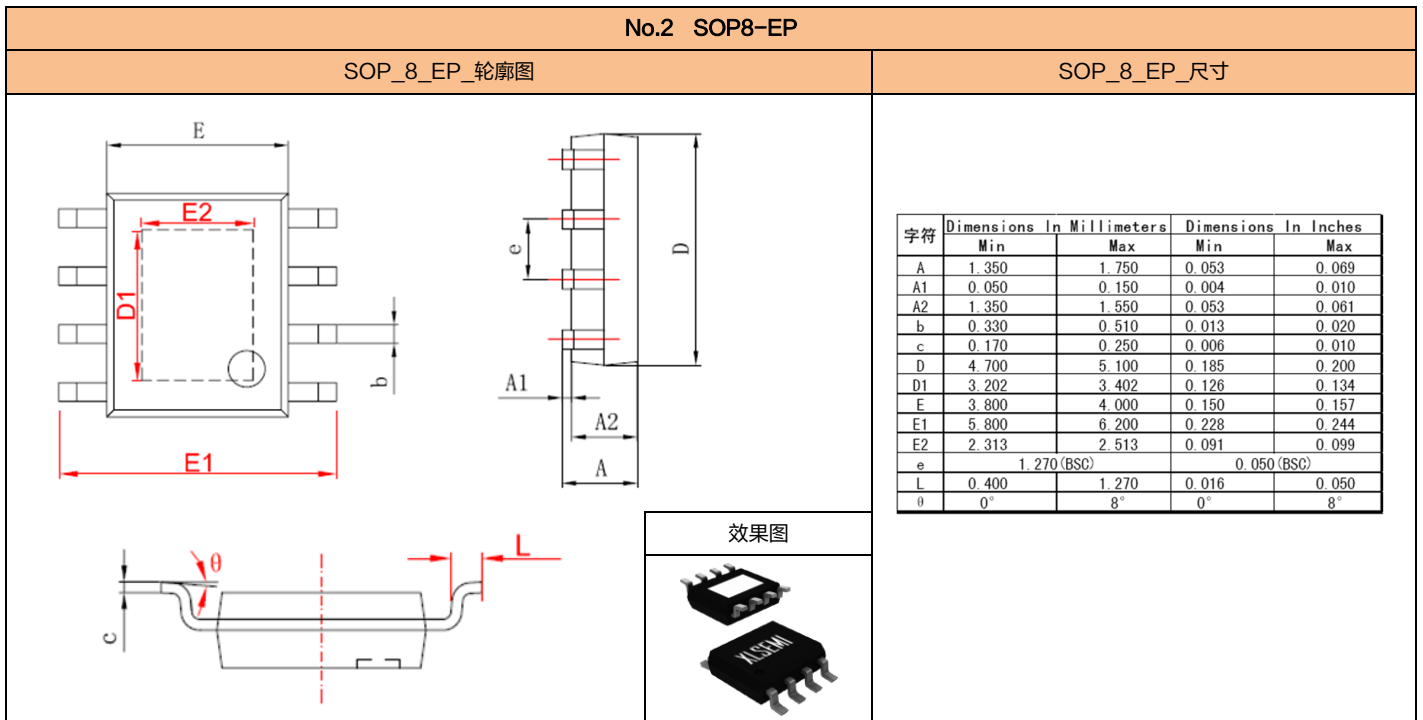



声明：由于产能扩充，相同封装的产品外形存在略微差异，具体信息参考规格书及实物！

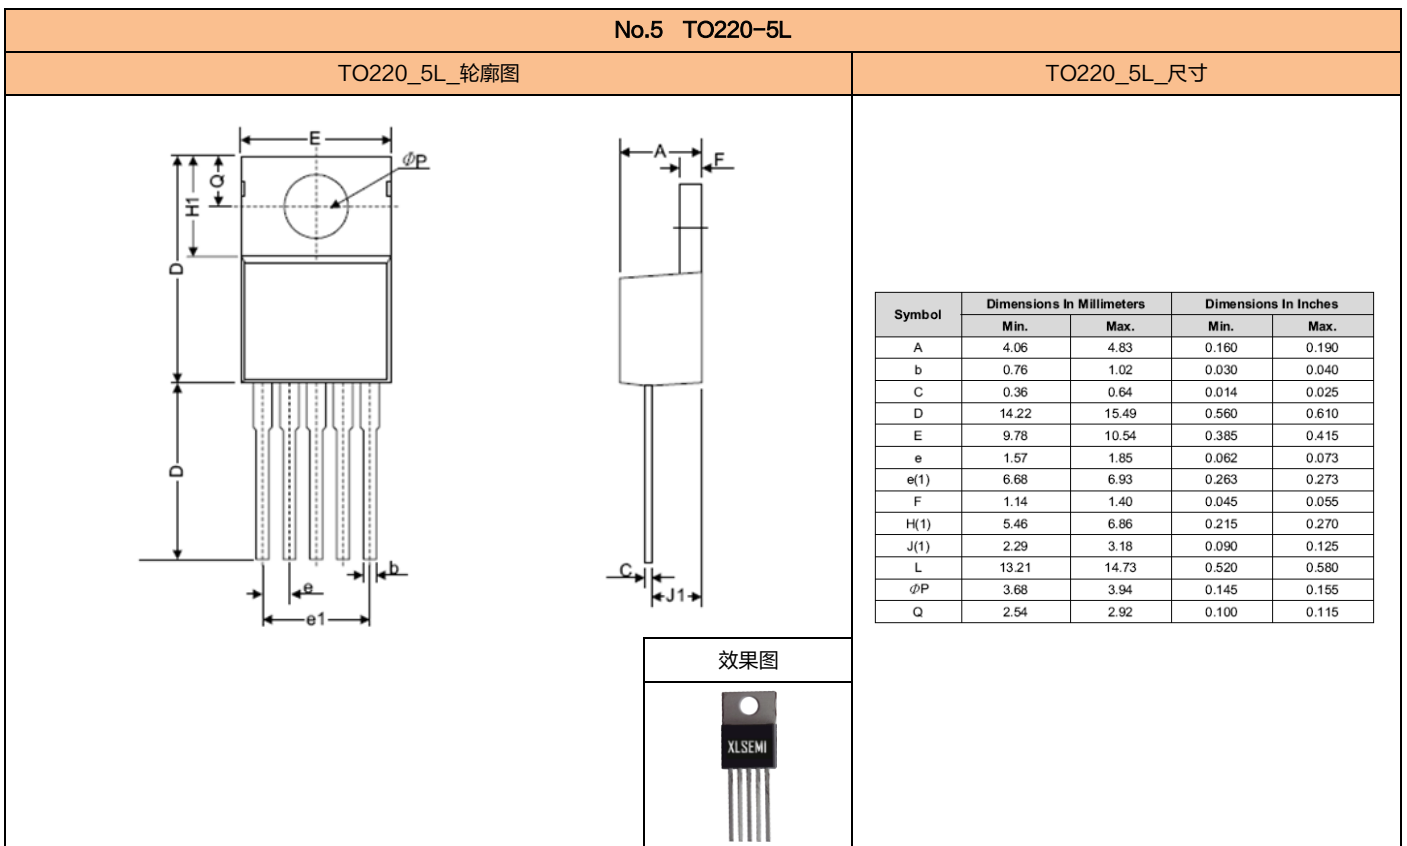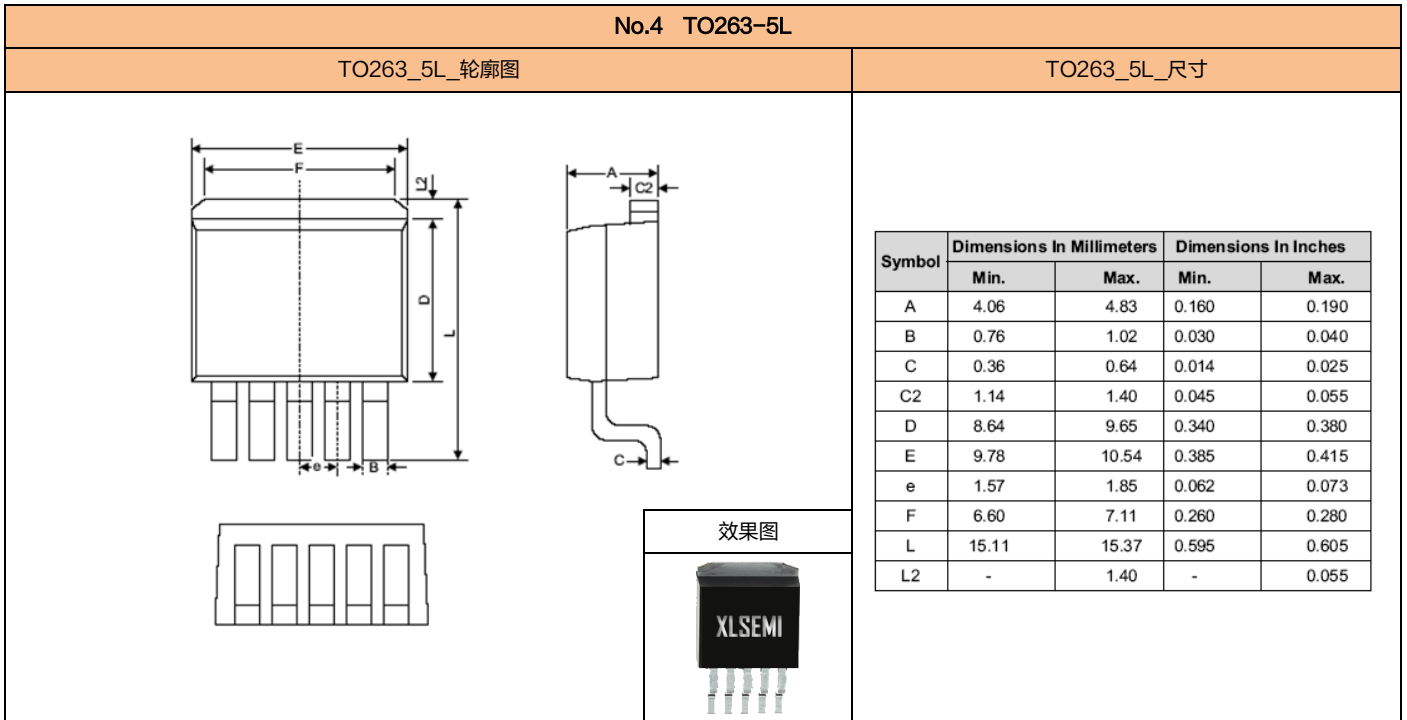

声明：由于产能扩充，相同封装的产品外形存在略微差异，具体信息参考规格书及实物！

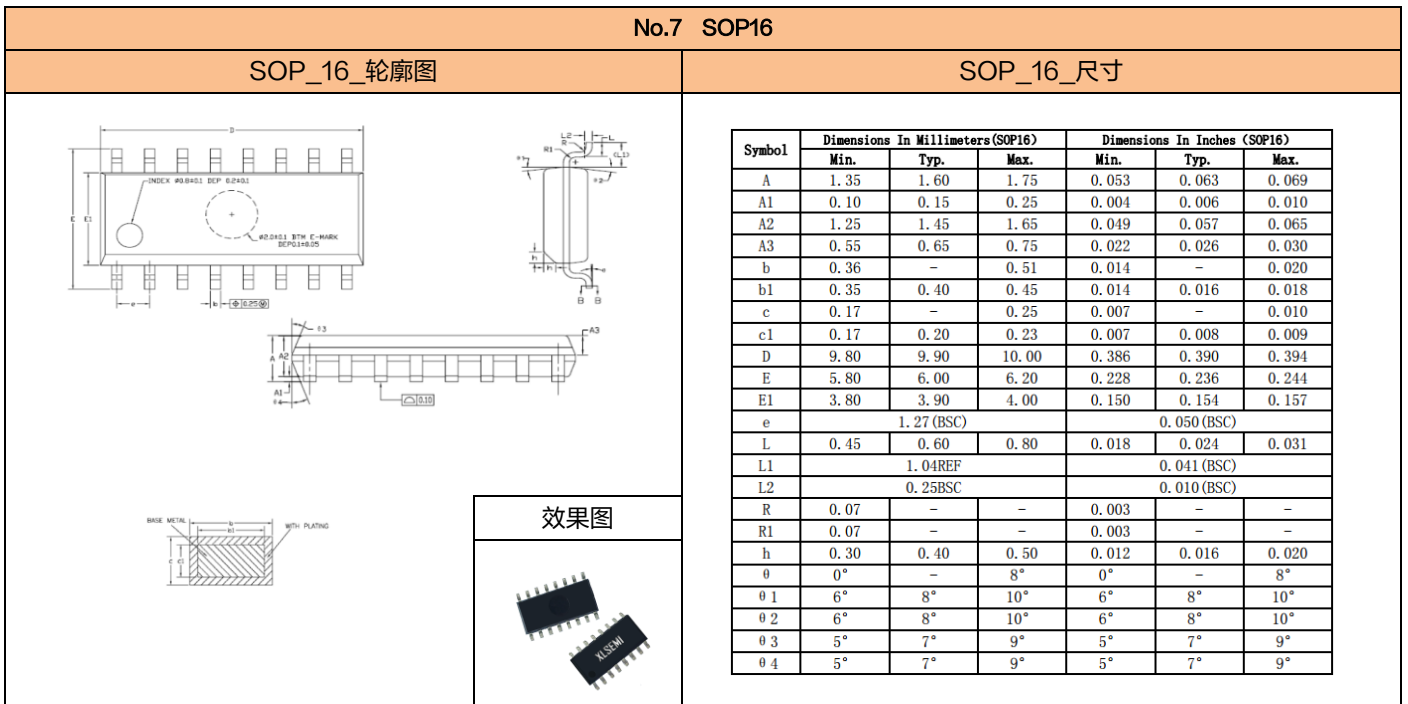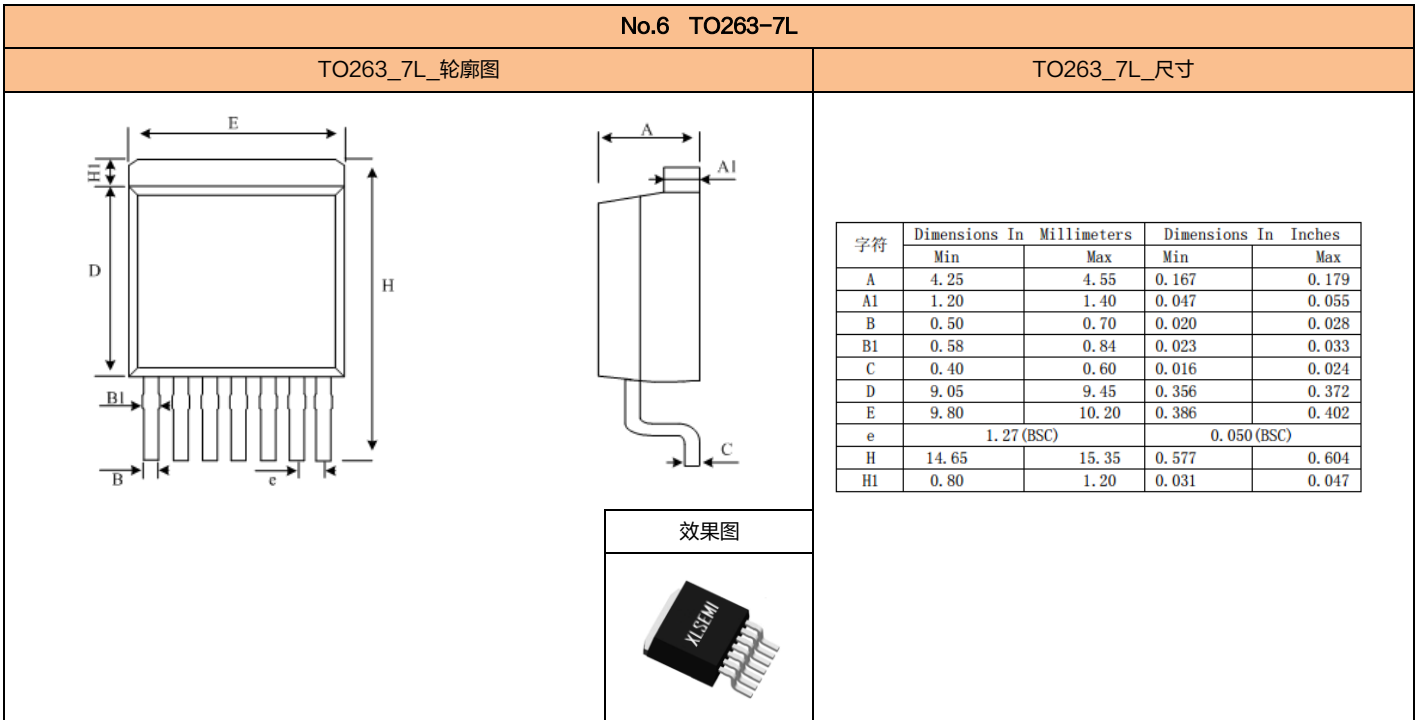

声明：由于产能扩充，相同封装的产品外形存在略微差异，具体信息参考规格书及实物！

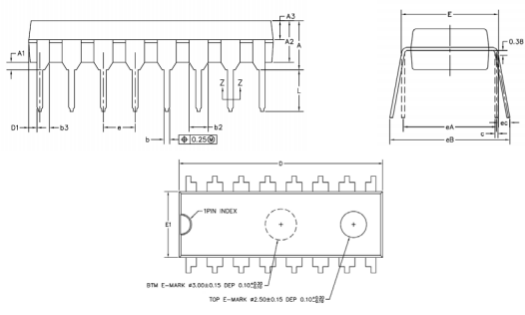No.8 DIP16																																																																																																																																																								
DIP_16_轮廓图	DIP_16_尺寸																																																																																																																																																							
 <p style="font-size: small; margin-top: 10px;"> WITH FLATTING BASE METAL </p>	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Symbol</th> <th colspan="3">Dimensions In Millimeters (DIP16)</th> <th colspan="3">Dimensions In Inches (DIP16)</th> </tr> <tr> <th>Min.</th> <th>Typ.</th> <th>Max.</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> </tr> </thead> <tbody> <tr><td>A</td><td>-</td><td>-</td><td>4.80</td><td>-</td><td>-</td><td>0.189</td></tr> <tr><td>A1</td><td>0.50</td><td>-</td><td>-</td><td>0.020</td><td>-</td><td>-</td></tr> <tr><td>A2</td><td>3.05</td><td>3.25</td><td>3.45</td><td>0.120</td><td>0.128</td><td>0.136</td></tr> <tr><td>A3</td><td>1.40</td><td>1.50</td><td>1.60</td><td>0.055</td><td>0.059</td><td>0.063</td></tr> <tr><td>b</td><td>0.38</td><td>-</td><td>0.55</td><td>0.015</td><td>-</td><td>0.022</td></tr> <tr><td>b1</td><td>0.38</td><td>0.46</td><td>0.51</td><td>0.015</td><td>0.018</td><td>0.020</td></tr> <tr><td>b2</td><td>1.47</td><td>1.52</td><td>1.57</td><td>0.058</td><td>0.060</td><td>0.062</td></tr> <tr><td>b3</td><td>0.89</td><td>0.99</td><td>1.09</td><td>0.035</td><td>0.039</td><td>0.043</td></tr> <tr><td>c</td><td>0.21</td><td>-</td><td>0.35</td><td>0.008</td><td>-</td><td>0.014</td></tr> <tr><td>c1</td><td>0.20</td><td>0.25</td><td>0.28</td><td>0.008</td><td>0.010</td><td>0.011</td></tr> <tr><td>D</td><td>19.20</td><td>19.30</td><td>19.40</td><td>0.756</td><td>0.760</td><td>0.764</td></tr> <tr><td>D1</td><td>0.13</td><td>-</td><td>-</td><td>0.005</td><td>-</td><td>-</td></tr> <tr><td>E</td><td>7.62</td><td>7.87</td><td>8.25</td><td>0.300</td><td>0.310</td><td>0.325</td></tr> <tr><td>E1</td><td>6.25</td><td>6.35</td><td>6.45</td><td>0.246</td><td>0.250</td><td>0.254</td></tr> <tr><td>e</td><td colspan="3">2.54 (BSC)</td><td colspan="3">0.100 (BSC)</td></tr> <tr><td>eA</td><td colspan="3">7.62 (BSC)</td><td colspan="3">0.300 (BSC)</td></tr> <tr><td>eB</td><td>7.87</td><td>8.80</td><td>10.90</td><td>0.310</td><td>0.346</td><td>0.429</td></tr> <tr><td>eC</td><td>0.00</td><td>-</td><td>1.52</td><td>0.000</td><td>-</td><td>0.060</td></tr> <tr><td>L</td><td>2.92</td><td>3.30</td><td>3.81</td><td>0.115</td><td>0.130</td><td>0.150</td></tr> </tbody> </table>						Symbol	Dimensions In Millimeters (DIP16)			Dimensions In Inches (DIP16)			Min.	Typ.	Max.	Min.	Typ.	Max.	A	-	-	4.80	-	-	0.189	A1	0.50	-	-	0.020	-	-	A2	3.05	3.25	3.45	0.120	0.128	0.136	A3	1.40	1.50	1.60	0.055	0.059	0.063	b	0.38	-	0.55	0.015	-	0.022	b1	0.38	0.46	0.51	0.015	0.018	0.020	b2	1.47	1.52	1.57	0.058	0.060	0.062	b3	0.89	0.99	1.09	0.035	0.039	0.043	c	0.21	-	0.35	0.008	-	0.014	c1	0.20	0.25	0.28	0.008	0.010	0.011	D	19.20	19.30	19.40	0.756	0.760	0.764	D1	0.13	-	-	0.005	-	-	E	7.62	7.87	8.25	0.300	0.310	0.325	E1	6.25	6.35	6.45	0.246	0.250	0.254	e	2.54 (BSC)			0.100 (BSC)			eA	7.62 (BSC)			0.300 (BSC)			eB	7.87	8.80	10.90	0.310	0.346	0.429	eC	0.00	-	1.52	0.000	-	0.060	L	2.92	3.30	3.81	0.115	0.130	0.150
Symbol	Dimensions In Millimeters (DIP16)			Dimensions In Inches (DIP16)																																																																																																																																																				
	Min.	Typ.	Max.	Min.	Typ.	Max.																																																																																																																																																		
A	-	-	4.80	-	-	0.189																																																																																																																																																		
A1	0.50	-	-	0.020	-	-																																																																																																																																																		
A2	3.05	3.25	3.45	0.120	0.128	0.136																																																																																																																																																		
A3	1.40	1.50	1.60	0.055	0.059	0.063																																																																																																																																																		
b	0.38	-	0.55	0.015	-	0.022																																																																																																																																																		
b1	0.38	0.46	0.51	0.015	0.018	0.020																																																																																																																																																		
b2	1.47	1.52	1.57	0.058	0.060	0.062																																																																																																																																																		
b3	0.89	0.99	1.09	0.035	0.039	0.043																																																																																																																																																		
c	0.21	-	0.35	0.008	-	0.014																																																																																																																																																		
c1	0.20	0.25	0.28	0.008	0.010	0.011																																																																																																																																																		
D	19.20	19.30	19.40	0.756	0.760	0.764																																																																																																																																																		
D1	0.13	-	-	0.005	-	-																																																																																																																																																		
E	7.62	7.87	8.25	0.300	0.310	0.325																																																																																																																																																		
E1	6.25	6.35	6.45	0.246	0.250	0.254																																																																																																																																																		
e	2.54 (BSC)			0.100 (BSC)																																																																																																																																																				
eA	7.62 (BSC)			0.300 (BSC)																																																																																																																																																				
eB	7.87	8.80	10.90	0.310	0.346	0.429																																																																																																																																																		
eC	0.00	-	1.52	0.000	-	0.060																																																																																																																																																		
L	2.92	3.30	3.81	0.115	0.130	0.150																																																																																																																																																		
 <p style="text-align: center; font-weight: bold;">效果图</p>																																																																																																																																																								

声明：由于产能扩充，相同封装的产品外形存在略微差异，具体信息参考规格书及实物！