

XL44A

#### **Features**

- Wide Operating Voltage Range: 3V~7V
- Low Operation Current: 1.3mA@V<sub>DD</sub>=3.3V
- Linearity: ±1%
- Sensitivity: 4.0mV/Gs@V<sub>DD</sub>=3.3V
- Rail to Rail Linear Range:0.2V ~ 3.1V@V<sub>DD</sub>=3.3V
- Low Noise Output Without External Capacitor Filtering
- Built in Output Anti Backflow Function
- Temperature Grade 1: -40 °C to 125 °C Ambient Operating Temperature Range
- Device HBM ESD Classification Level Class3A
- TO92S-3 package

#### **Applications**

- Game Handle Trigger / Joystick
- Position / Liquid Level Sensing
- Motor Control

#### **General Description**

XL44A is a low-power, wide voltage, wide linear range, and wide temperature range rail to rail linear Hall sensor optimized for gaming controller applications. Its output voltage varies proportionally with the induced magnetic field strength, and its linear output voltage range follows the power supply voltage variation. The zero point output voltage (without magnetic field) of XL44A defaults to half of the power supply voltage. The typical operating voltage of the chip is 3.3V, with low operating current and a working temperature range of −40 °C~125 °C. It is widely used in consumer electronics and industrial control fields.

The XL44A integrates high precision current source, temperature compensation module, Hall array, amplifier, driver module and other circuit modules, which provides high linearity and strong immunity to electromagnetic interference over the full voltage range and full temperature range.

## Typical application schematic

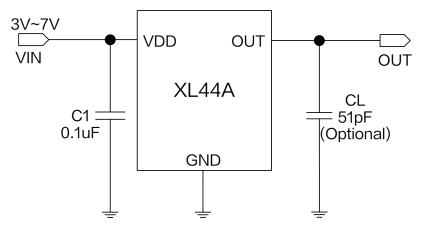


Figure 1.XL44A Typical application schematic



XL44A

# Pin Configurations






Figure 2. Pin Configuration of XL44A

# Table1.Pin Description

Pin Number	Pin Name	Description
1	VDD	Supply Voltage Input Pin, XL44A operates from 3V to 7V DC voltage.
2	GND	Ground pin.
3	OUT	Output Pin.

# **Ordering Information**

Order Information	Marking ID	Package Type	Eco Plan	Packing Type Supplied As
XL44A	XL44A	TO92S-3	RoHS & HF	1000 Units Per Bag



XL44A

#### **Function Block**

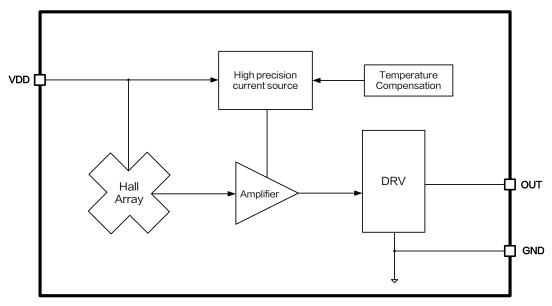


Figure 3. Function Block Diagram of XL44A

#### Absolute Maximum Ratings (Note1)

Parameter	Symbol	Value	Unit
Input Pin Voltage	$V_{ extsf{DD}}$	-0.3 ~ 25	V
Output Pin Voltage	Vout	−0.3 ~ 25	V
Thermal Resistance(TO92S-3) (Junction to Ambient, No Heatsink, Free Air)	RJA	160	°C/W
Operating Temperature	T <sub>A</sub>	<b>−40 ~ 125</b>	Ô
Operating Junction Temperature	TJ	<b>−40 ~ 150</b>	°C
Storage Temperature	T <sub>STG</sub>	<b>−65 ~ 150</b>	°C
Lead Temperature(Soldering,10sec)	T <sub>LEAD</sub>	260	°C
ESD(HBM)	-	>4000	V

**Note1:** Stresses greater than those listed under Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.



XL44A

#### XL44A Electrical Characteristics (Note2)

 $T_A = 25^{\circ}C$ ,  $V_{DD} = 3.3V$ , system parameters test circuit figure 1, unless otherwise specified.

Parameters	Symbol	Test Condition	Min.	Тур.	Max.	Unit
Operation Voltage	$V_{DD}$	_	3	3.3	7	V
Operation Current	I <sub>DD</sub>	_	1.1	1.3	1.6	mA
Output Load Resistance	R∟	B=-1000Gs	_	10	_	kΩ
	.,	B=+1000Gs V <sub>DD</sub> =3.3V	3.05	3.1	_	V
Output Valtage Denge	V <sub>OUT(H)</sub>	B=+1000Gs V <sub>DD</sub> =5.0V	4.75	4.8	_	V
Output Voltage Range	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	B=-1000Gs V <sub>DD</sub> =3.3V	_	0.2	0.25	V
	V <sub>OUT(L)</sub>	B=-1000Gs V <sub>DD</sub> =5.0V	-	0.2	0.25	V
Static Output Voltage	V <sub>OUT(Q)</sub>	B=0Gs V <sub>DD</sub> =3.3V	1.533	1.65	1.767	V
Static Output Voltage		B=0Gs V <sub>DD</sub> =5.0V	_	2.50	_	V
Linearity	Lin	_	-1	_	1	%
Output Settling Time	_	B=0Gs	_	15	20	μs
Output Noise	_	Bandwidth= 10Hz to 10kHz	_	1.5	_	mV

#### Note2:

- (1) Linearity is the degree to which the static characteristic curve between the input and output quantities deviates from a straight line.
- (2) The Output Settling Time is the time difference between the establishment and stabilization of the output voltage to the static output voltage.
- (3) Built in output anti backflow function, when used in parallel, if some chips fail or lose power, their output will be high impedance.



## XL44A Magnetic Characteristics (Note3)

Parameters	Symbol	Test Condition	Min.	Тур.	Max.	Unit
Sensitivity	Sens	V <sub>DD</sub> =3.3V	3.72	4.00	4.28	mV/Gs
		V <sub>DD</sub> =5.0V	_	6.85	_	mV/Gs

#### Note3:

- (1) The magnetic South Pole (S) is defined as the positive magnetic field. The sensitivity in the table corresponds to measurements taken with the magnetic field perpendicular to the chip's marking surface.
- (2) XL44A is optimized for game handles. When  $V_{DD}$ =3.3V, the sensitivity corresponding to output voltage is in the linear range of 0.2V~3.1V as shown in the table. When  $V_{DD}$ =5.0V, the sensitivity corresponding to output voltage is in the linear range of 0.2V~4.8V as shown in the table.

#### XL44A Output Characteristics

 $T_A$  = 25 °C, system parameters test circuit figure1, test methods figure4, unless otherwise specified.

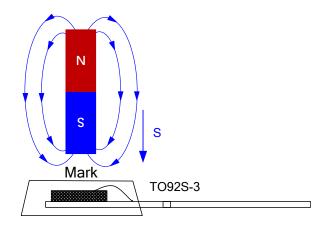


Figure 4. Test Schematic of XL44A



XL44A

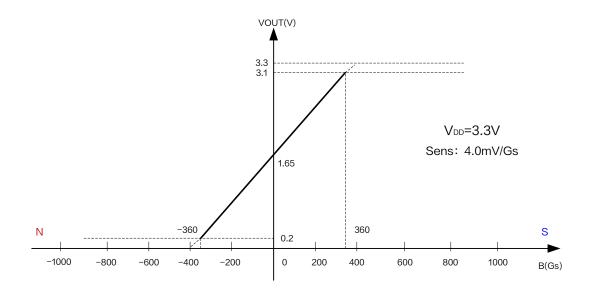


Figure 5. Output Characteristic Curve of XL44A (VDD = 3.3V)

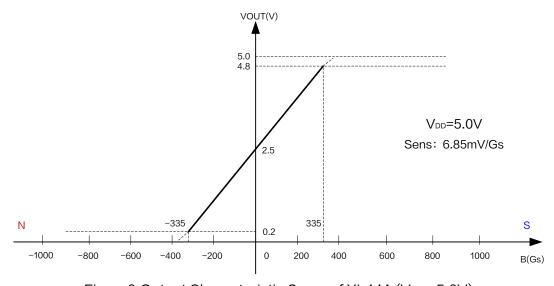



Figure 6. Output Characteristic Curve of XL44A (VDD = 5.0V)




XL44A

# Package Information

## TO92S-3

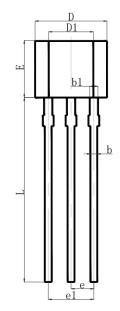

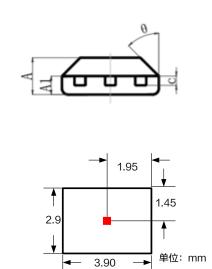

Cymphol	Dimensions I	n Millimeters	Dimensions In Inches		
Symbol	Min.	Max.	Min.	Max.	
А	1.42	1.62	0.056	0.064	
A1	0.66	0.87	0.026	0.034	
b	0.33	0.56	0.013	0.022	
b1	0.40	0.51	0.016	0.020	
С	0.33	0.51	0.013	0.020	
D	3.90	4.10	0.154	0.162	
D1	2.28	2.68	0.090	0.106	
E	2.90	3.25	0.114	0.128	
е	1.27 REF		0.050 REF		
e1	2.44	2.64	0.096	0.104	
L	13.50	15.50	0.532	0.611	
θ	45° REF		45° REF		



XL44A

#### Important Notice

XLSEMI reserve the right to make modifications, enhancements, improvements, corrections or other changes without notice at any time. XLSEMI does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. XLSEMI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using XLSEMI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards. XLSEMI warrants performance of its products to the specifications applicable at the time of sale, in accordance with the warranty in XLSEMI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent XLSEMI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

For the latest product information, go to www.xlsemi.com.